
# F6® ADHESIVE TAPE
# 永六科技



## Leading Adhesive Tape Industry
## 专业胶粘制品生产企业

宁波市永六包装材料科技有限公司
Ningbo Yongliu Import and Export Co.Ltd

# 公司简介 Company Profile ≫

Ningbo Yongliu Import and Export Co.Ltd

Ningbo Yongliu Meterial Technology Co., Ltd. was founded in 2006, and through its strategic adjustment for 12 years, it has made a lot of achievements in reform transformation, research and development, and has become an enterprise that professionally produces special adhesive tapes and acrylic pressure-sensitive adhesive glues. It is also a manufacturing enterprise of professional adhesive products that integrates research and development, sales and after-sale service.

The company has powerful research and development strengths, and with 5 years of physical experiments and field experiments, its products have been comparable with international top products. It covers an area of 10,666 square meters, and own 6-8 reaction kettles, 2 coating lines and 6 high-speed cutting machines. It produces various tape jumbo rolls and acrylic pressure-sensitive adhesive oily glues, and its processional R & D engineers, technicians and advanced devices enable its products to pass SGS, EBT and other detection certifications.

The company has independently researched and developed several special tapes, such as low VOC high-temperature resistance double-sided adhesive tape, flame retardant double-sided adhesive tape, PE foam adhesive tape, non-base material double-sided adhesive tape, PET adhesive tape, etc., and it also has the capacity to produce acrylic pressure-sensitive adhesive glue, and is able to produce custom products according to customer requirements and by combining the engineering philosophy.

Yongliu has been developing continuously and making arduous efforts by virtue of its advanced operation philosophy and modern management tools, and as in the past, Yongliu will adhere to its purpose of “profession, concentration and attention”, exceed customer expectations continuously and improve the product quality. Yongliu sincerely cooperate with domestic and foreign manufacturers as well as all walks of life, to create a better tomorrow.

宁波市永六包装材料科技有限公司成立于2006年，12年战略调整，改革转型并研发已迅速成长为一家专业生产特种胶带和丙烯酸压敏胶胶水企业，集研发、销售及售后服务于一体的专业胶粘制品生产企业。

公司研发实力雄厚，经过5年之久的物理实验与实地实验，已迅速发展成国际顶端产品相媲美，占地面积10666平方米。目前拥有6-8个反应釜，两条涂布生产线，高速切割机6台，生产各类胶带母卷及丙烯酸压敏胶胶水，有专业研发工程师，技术人员和先进的设备使得产品通过了SGS，EBT等检测认证。

公司自主研发低VOC耐高温双面胶带、阻燃双面胶带、PE泡棉胶带、PET胶带等多种特种胶带，同时具备生产丙烯酸压敏胶胶水的能力，并能根据客户要求，结合工程理念订制产品。

先进的经营理念，现代化的管理手段使永六不断发展，搏击长空，永六将一如既往，恪守“专业、专注、专心”的宗旨，不断超越客户期望，提高产品质量，永六诚挚与国内外广大厂商，社会各界携手合作，共创美好明天。



# Catalog/目录



# 丙烯酸酯类胶黏剂(双组份) | Acrylic Pressure Sensitive Adhesive (Two Component)



| YL-6008 | | | |
|---|---|---|---|
| Identification 外 观 | Solid content 固含量 | Viscosity(mPas) 粘 度 | Features & Application 特性及应用领域 |
| Transparent pale yellow liquid 透明淡黄色液体 | 45±1 | 9000-12000 | Eco-friendly & low odor, High temperature resistant. General acrylic pressure sensitive adhesive. Suitable for double-sided tape coating. 环保低气味，耐高温性显著，通用型胶水，适用于双面胶带的涂布 |



| YL-6005 | | | |
|---|---|---|---|
| Identification 外 观 | Solid content 固含量 | Viscosity(mPas) 粘 度 | Features & Application 特性及应用领域 |
| Colorless transparent liquid 透明无色液体 | 45±1 | | High temperature resistant. Suitable for tape coating of PET、OP. 耐高温性显著、适用于PET、op等材料的单面、双面胶带的涂布 |



| YL-6007 | | | |
|---|---|---|---|
| Identification 外 观 | Solid content 固含量 | Viscosity(mPas) 粘 度 | Features & Application 特性及应用领域 |
| Transparent pale yellow liquid 淡黄色透明液体 | 45±1 | 7000-9000 | High temperature resistant. General acrylic pressure sensitive adhesive. Suitable for double-sided tape coating. 耐高温性显著，通用型胶水，适用于双面胶带的涂布 |

| Storage Requirements/储存要求 | Storage Temperature:5-30℃ Storage Time: 6 months/储存温度：5-30℃， 储存期：半年 |
|---|---|



# 丙烯酸酯类胶黏剂(单组份) | Acrylic Pressure-sensitive Adhesive (One Component)



| YL-2016 | | | |
|---|---|---|---|
| Identification 外观 | Solid content 固含量 | Viscosity(mPas) 粘度 | Features & Application 特性及应用领域 |
| Transparent pale yellow liquid 透明淡黄色液体 | 45±1 | 4000-6000 | Eco-friendly& low odor. Excellent adhesivity. Suitable for composite materials 环保低气味，对各种被粘体粘接力优越，铝箔、发泡等复合材料表现优异 |



| YL-2015 | | | |
|---|---|---|---|
| Identification 外观 | Solid content 固含量 | Viscosity(mPas) 粘度 | Features & Application 特性及应用领域 |
| Transparent pale yellow liquid 透明淡黄色液体 | 45±1 | 3000-5000 | Excellent adhesivity. Suitable for composite materials 对各种被粘体粘接力优越，铝箔、发泡等复合材料表现优异 |




| YL-2013 | | | |
|---|---|---|---|
| Identification 外观 | Solid content 固含量 | Viscosity(mPas) 粘度 | Features & Application 特性及应用领域 |
| Colorless transparent liquid 透明无色液体 | 45±1 | 2500-5500 | Excellent adhesivity. Suitable for composite materials 对各种被粘体粘接力优越，铝箔、发泡等复合材料表现优异 |

| Storage Requirements/储存要求 | Storage Temperature:5-30℃ Storage Time: 6 months/储存温度：5-30℃， 储存期：半年 |
|---|---|

压敏胶系列产品主要包括乳液型压敏胶和溶剂型压敏胶，主要应用于涂布在纸质（如牛皮纸带）、拉伸聚丙烯（如BOPP胶带）、聚乙烯及其他塑料（如PVC胶带）、也可用于玻璃、塑料、纸质、木材质等商品作标签粘贴以及较平整光滑的陶瓷、不锈钢和铁质上的标签粘接。本公司也可以根据客户的要求，为其开发出满足客户要求的产品。



# 棉纸双面胶带 | Tissue Double-sided Tape

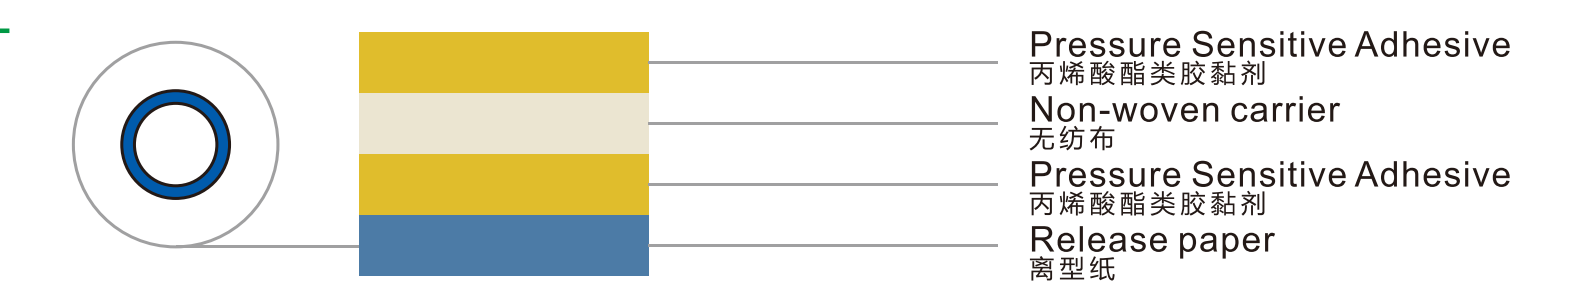



## 特粘棉纸双面胶带 Strong Adhesive Tissue Double-sided Tape



- 采用柔软的绵纸芯材，初粘性强，高强粘贴力。
- 厚度0.15mm 例如YL-5009

- It adopts soft tissue paper core materials,and the tape has good adhesive and loop tack.
- The thickness of the tape is 0.15mm.(Such as YL-5009)

## 耐高温双面胶带 Heat-resistant Tissue Double-sided Tape

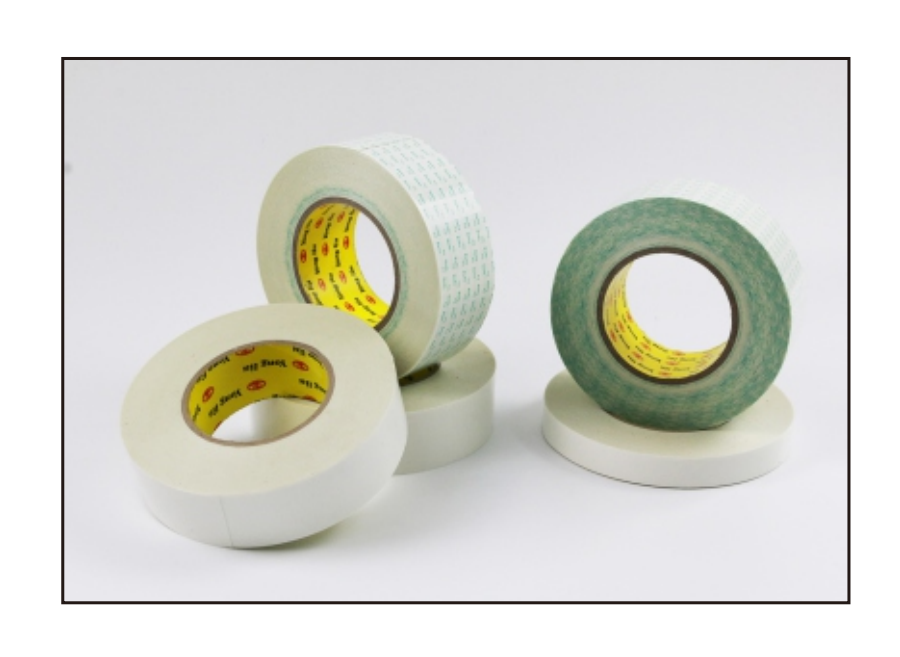

- 采用柔软的绵纸芯材，耐高温80-120℃，耐曲面耐老化，低气味低VOC，胶带跟随性能好。
- 厚度0.12-0.14mm 例如（YL-5001,YL-5002,YL-5006)

- It adopts soft tissue paper core materials,and High temperature resistance for 80-120℃.Excellent surface resistance and aging resistance performance. Low VOC and Low odour are certificated.
- The thickness of the tape are 0.12-0.14mm (Such as YL-5001,YL-5002,YL-5006)


## 阻燃双面胶带 Fire Retardant Tissue Double-sided Tape




- 以绵纸为基础的一种受热膨胀的防火材料，内含活性炭阻燃剂，不含卤素，燃烧时低烟，无毒延烧速率不滴燃。
- 厚度0.14mm 例如（YL-5003，YL-5007)

- A heating-expansion fireproof material with tissue paper as the base material.It contains activated carbon flame retardants with no halogen,and during burning,it shows low smoke,no toxin,low spread rate and no drop burning.
- The thickness of the tape is 0.14mm.(Such as YL-5003,YL-5007)

# PE泡棉双面胶带 | PE Foam Double-sided Tape

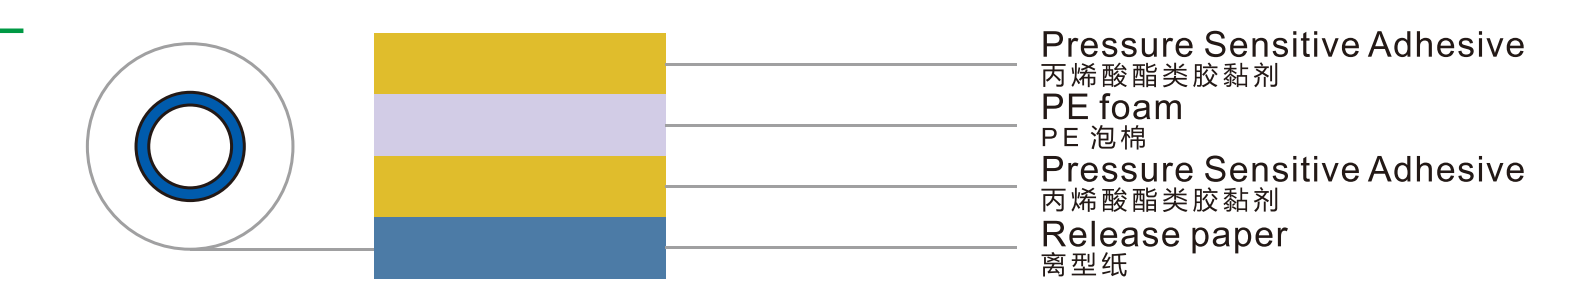



## 耐高温泡棉双面胶带 Heat-resistant Foam Double-sided Tape

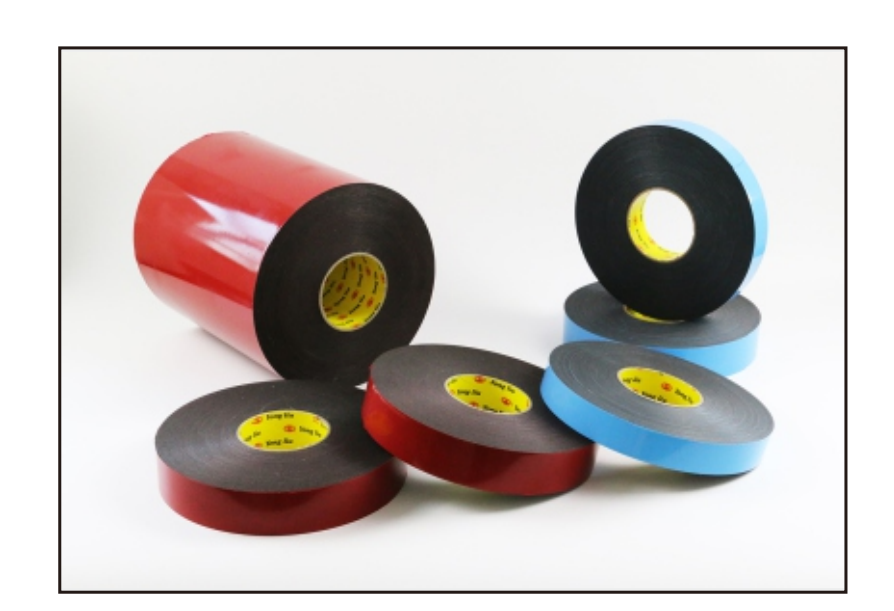

- 采用具有一定弹性的发泡体芯材，胶带防震，应用力缓冲性佳；
- 高粘接力，高密度离型膜，跟随性好。耐高温领域明显；
- 针对汽车配件使用。

- It adopts the foam core material with certain elasticity, and the tape has good anti-vibration and applied force buffering performance.
- High adhesive force. High-density release film,with good following performance.It has excellent temperature resistance .
- For the use of auto parts.


## 特粘泡棉双面胶带 Strong Adhesive Foam Double-sided Tape

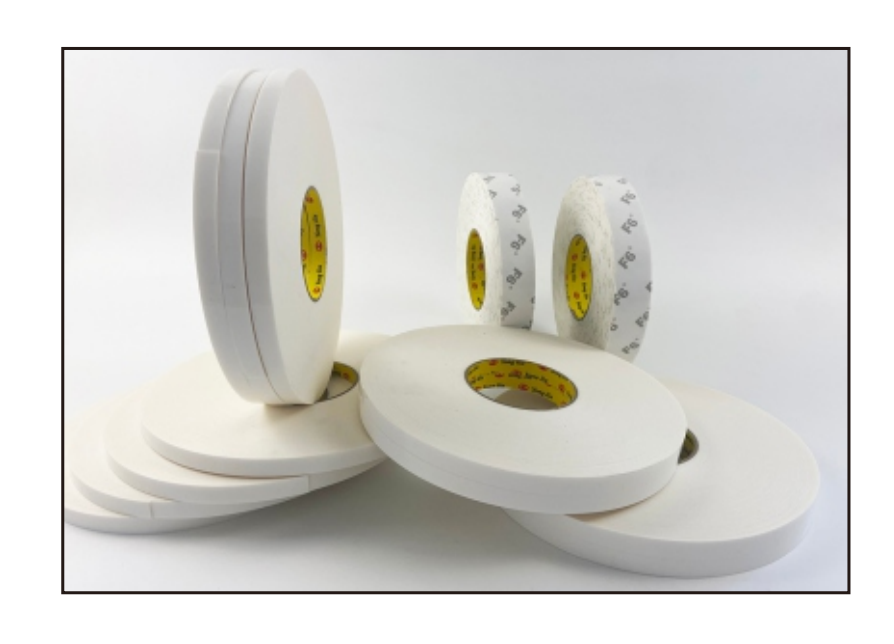

- 采用具有一定弹性的发泡体芯材，高粘接力,初粘强；
- 针对玻璃面板使用。

- It adopts the foam core material with certain elasticity. High-density release film,with good following performance. Strong adhesive and loop tack.
- Use for glass panels


## 特殊泡棉双面胶带 Special Adhesive Double-sided Tape

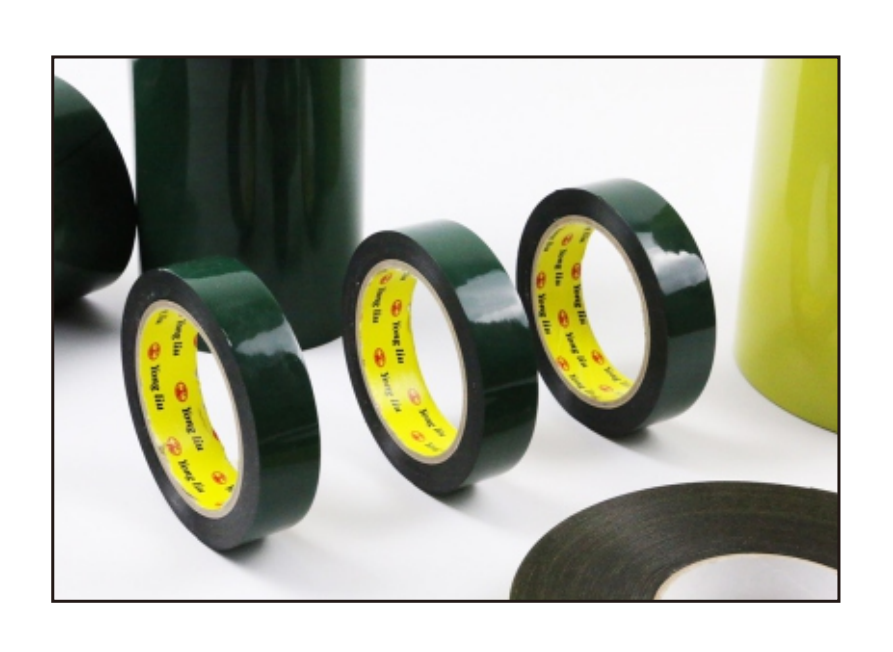


- 采用具有一定弹性的发泡体芯材，厚度超薄，高粘结力，耐高温高温；
- 针对电子产品使用。

- It adopts the foam core material with certain elasticity.It has thin thickness ,good adhesive ,high temperature and humidity resistance.
- For the use of electronic products.

# 双面胶带 | Double-sided Adhesive Tape

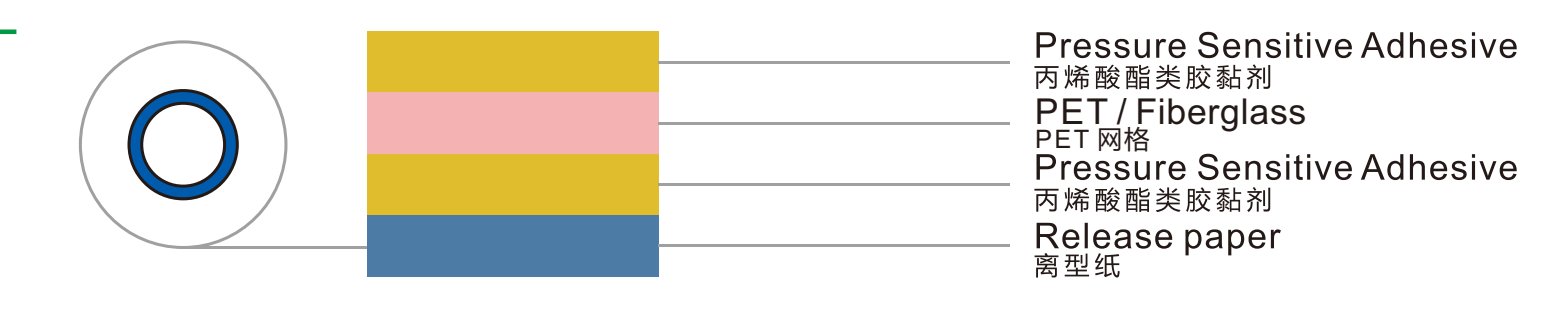



## PET双面胶带 PET Double-sided Adhesive Tape

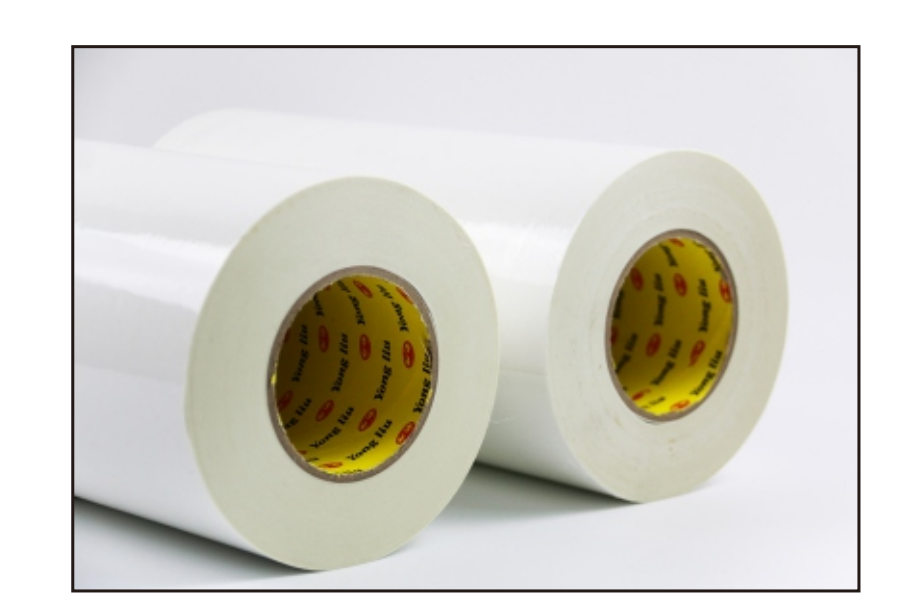

- 针对各种粘附体均体现良好的粘合性；
- 高抗剪切力，可以有效地减少空间，使产品微型化、小型化、易于冲切加工；
- 耐老化性能优良，被粘表面无残留痕迹。

- Good adhesiveness can be reflected in various adhered materials.
- High shear force resistance,which can effectively reduce the space and achieve the micromation and miniaturization of products.
- It is easy for die cutting processing. Excellent aging resistance performance,no residual trace on the adhered surface.


## 无基材双面胶带 Transfer Double-sided Adhesive Tape

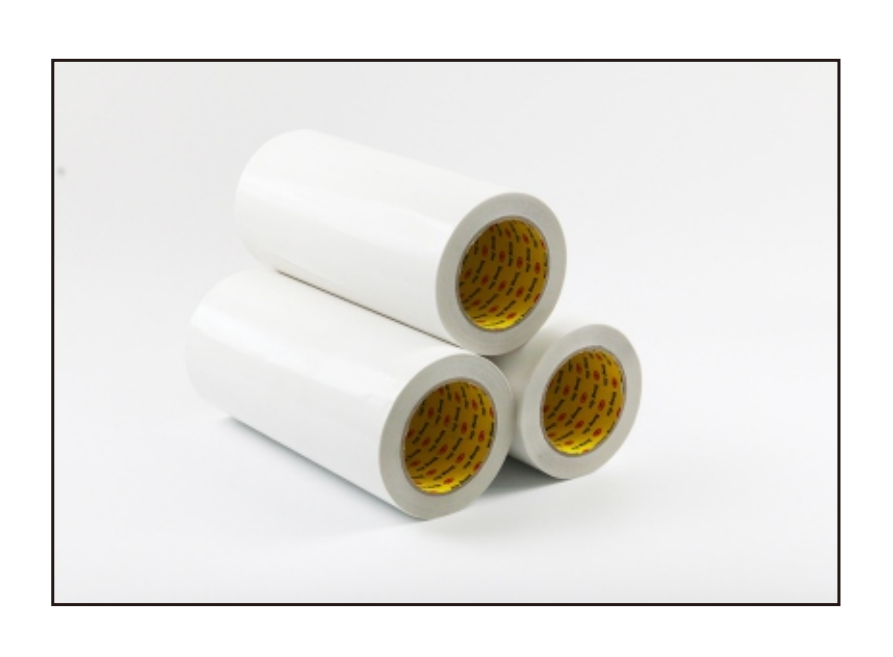

- 在离型纸表面涂布丙烯酸胶黏剂制成的双面胶；
- 长期耐温性好，粘着力强，模切性能优越，便于切割。

- The double-sided adhesive tape made by coating acrylic adhesive on the surface of release paper.
- Good long-term temperature resistance ,strong adhesive force,and excellent die cutting performance,which is convenient for cutting.

## 网格双面胶带 Fiberglass Mesh Double-sided Tape

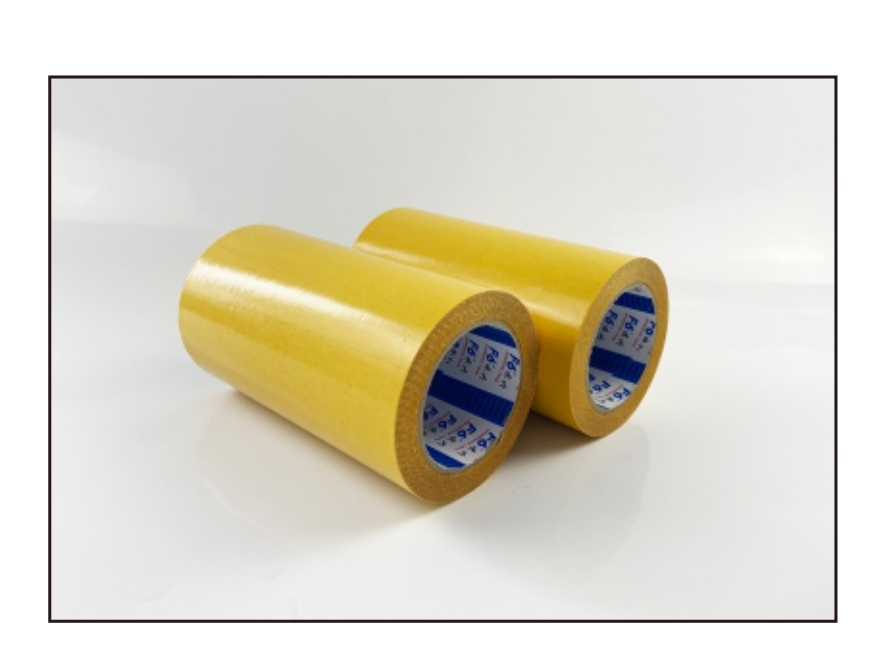

- 极好的粘结力，具有高拉应力和低延伸率，耐正常温度。

- Excellent adhesion. High tensile strength, low elongation. Nature temperature resistance.

显示屏边框固定
泡棉胶YL-W005

空调出风管保暖海棉贴合
YL-5006 YL-5007

车内嵌板粘合泡棉胶
YL-K008





空调导风管海棉
防水泡棉YL-K010


汽车里面顶棚装饰固定
背胶低VOC YL-5006


车窗饰条
防水泡棉YL-K010


空调保暖管YL-5002

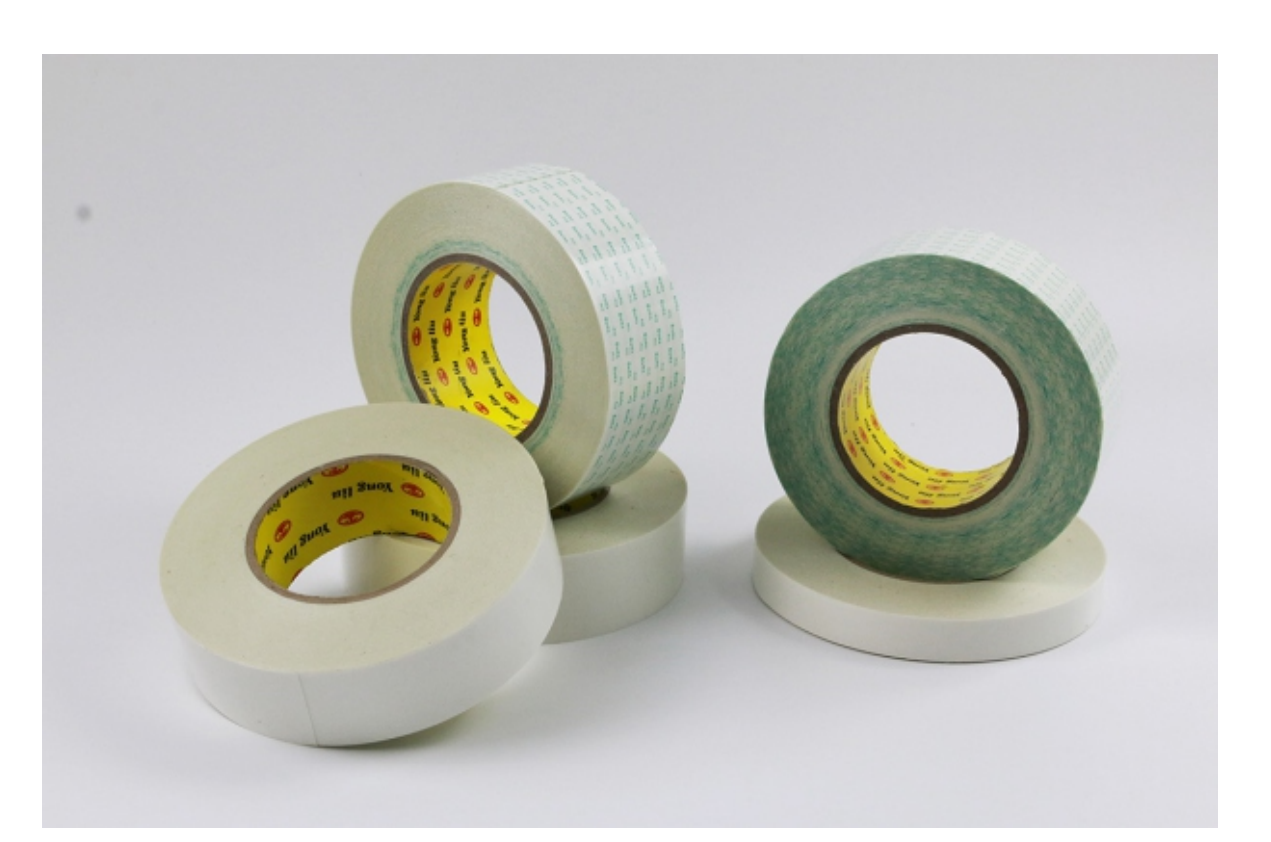

YL-5006

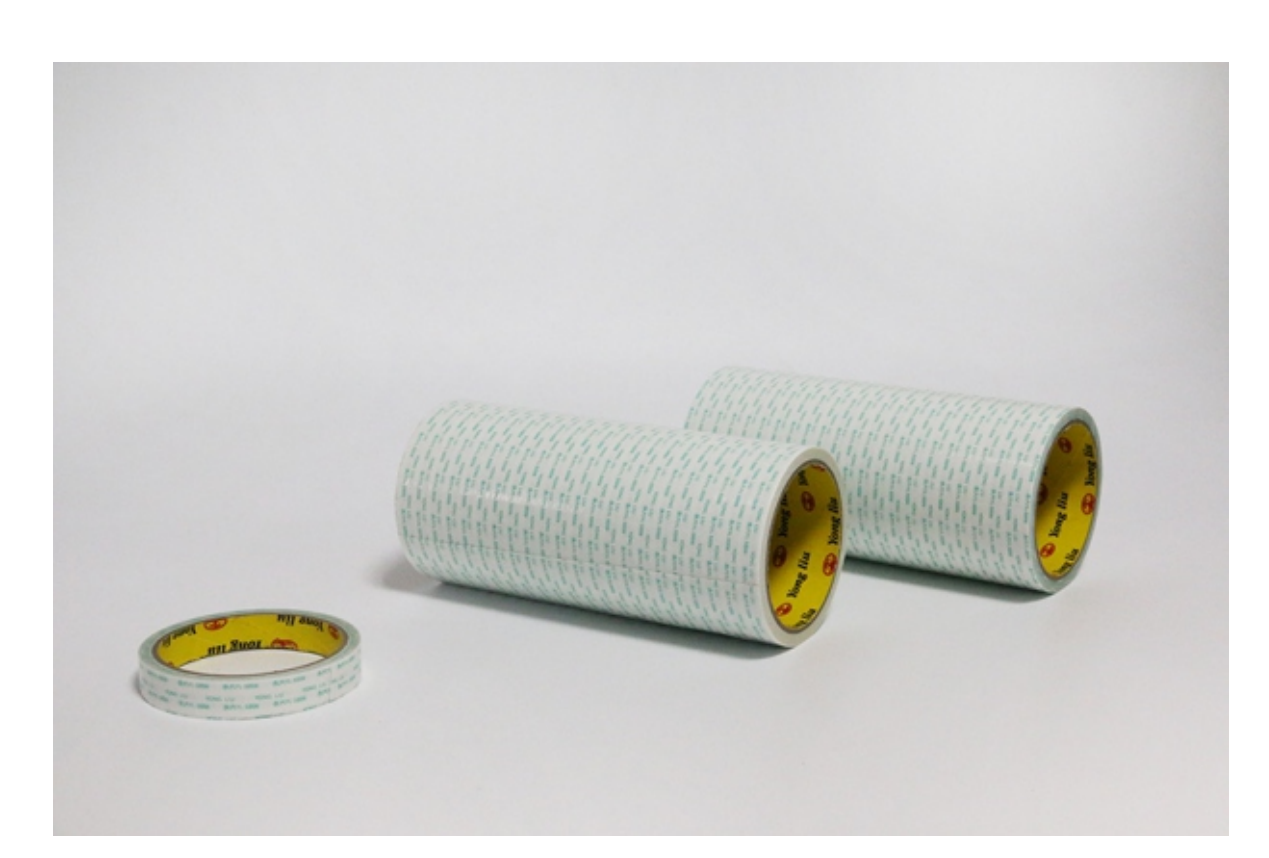

YL-5007

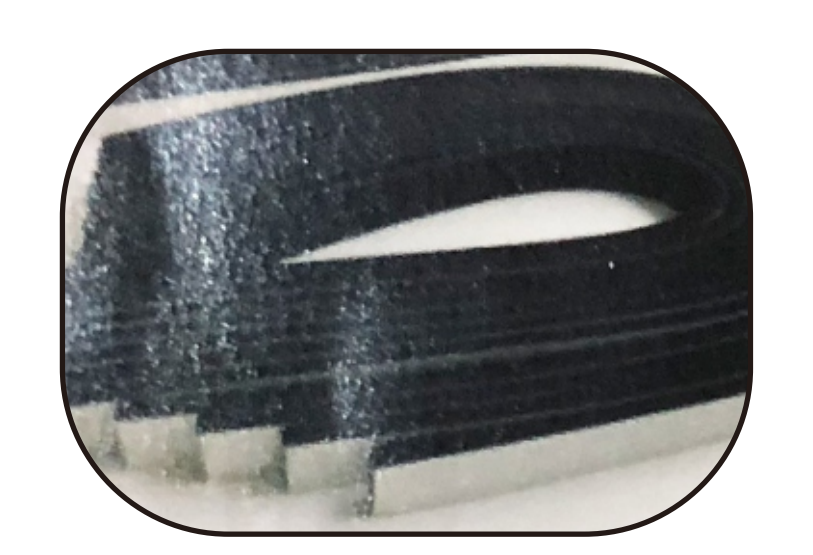

Gum sealing strip
背胶密封条

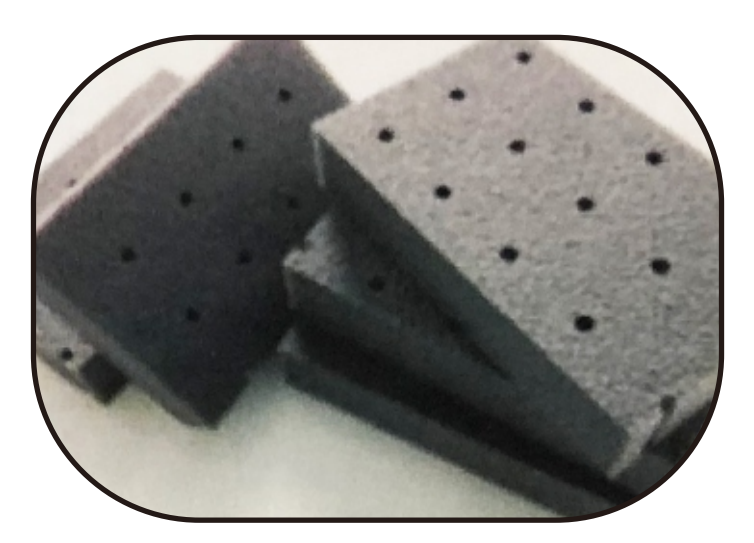

Sound -absorbing heat insulation gum cotton
吸音隔热背胶棉

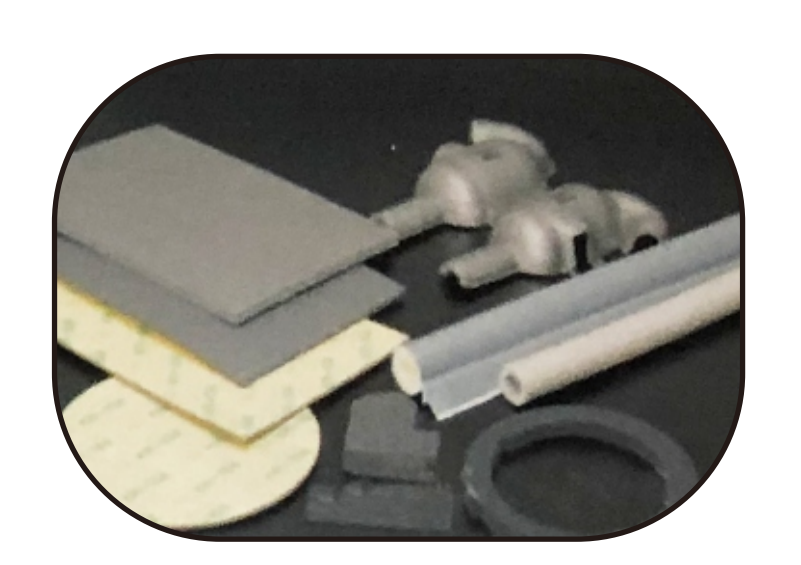

Gum thermal insulation pipe
背胶保温管

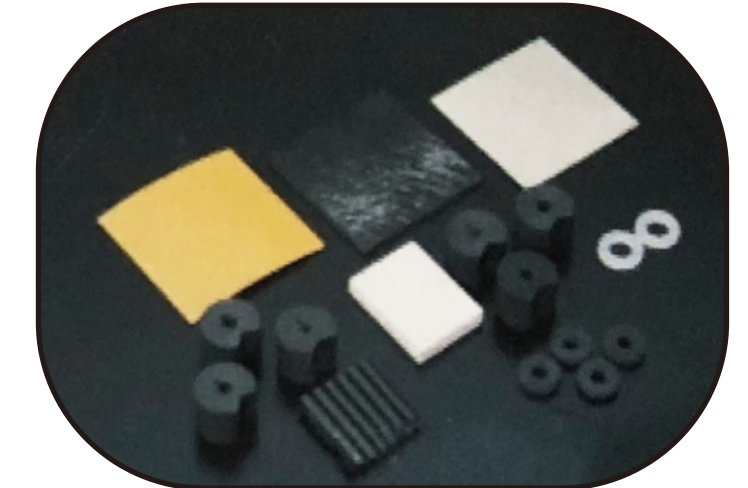
Gum Buffer sealing gasket
缓冲密封垫

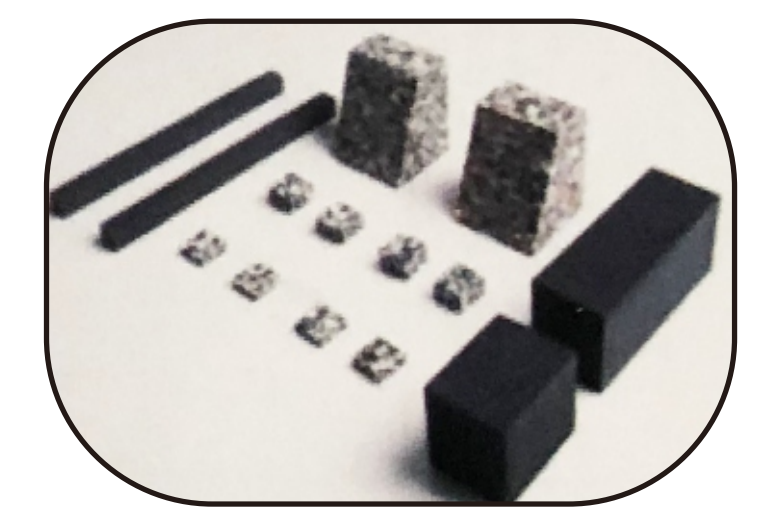
Buffer block
缓冲块

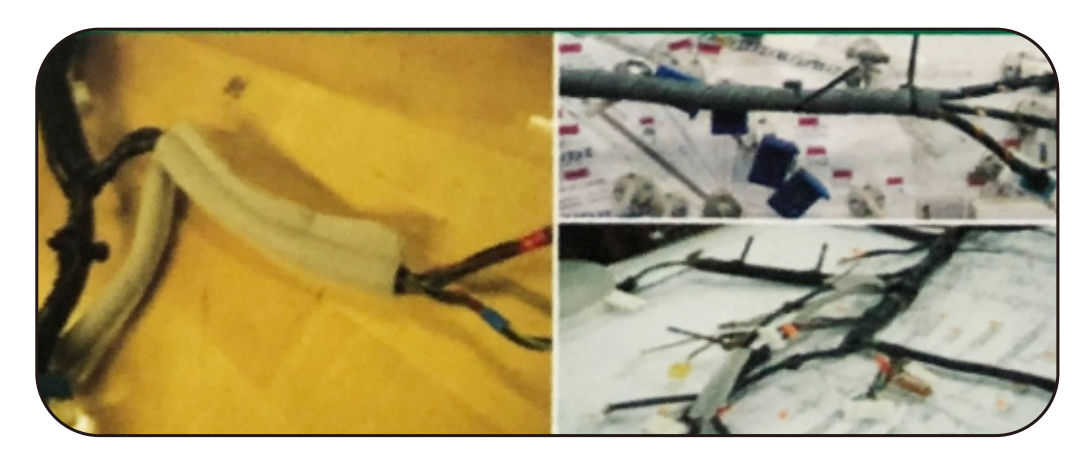

Encapsulation and fixing of vehicle wire harness
汽车线束包覆、固定


Vehicle air conditioner air outlet foam
汽车空调出风口泡棉



Door sound-absorbing cotton
车门吸音棉


Cabin soundproof cotton
车舱隔音棉

# 不残胶单面胶带 | NO Residual One side Tape

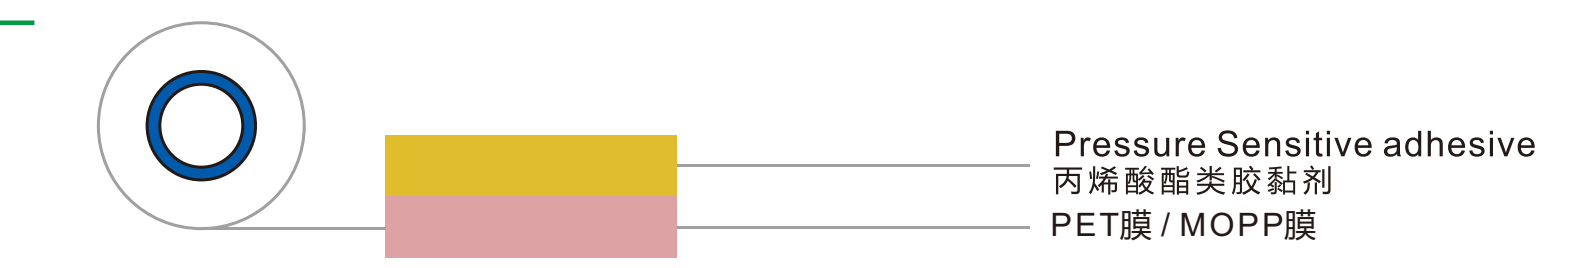


## PET胶带（高粘） PET Rubber Tape

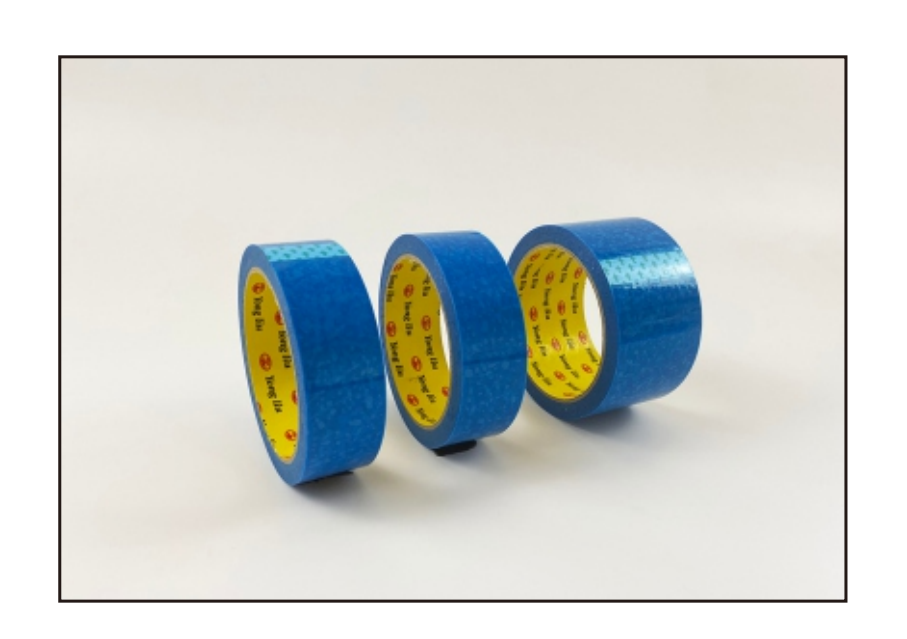

- 采用PET膜为基材，涂以橡胶胶黏剂制作而成，在高低温的广阔温度范围内都能发挥优良性能；
- 被粘表面无残留痕迹；
- 粘性高，厚度0.048mm。

- It adopts PET as the base material and is made by coating rubber on it. It can play excellent performance in a wide temperature range covering high and low temperature.
- No residual trace on the adhered surface.
- Good adhesive,the thickness of tape is 0.048mm.


## PET胶带（中粘） PET Adhesive Tape



- 采用PET膜为基材，涂以丙烯酸胶黏剂制作而成，在高低温的广阔温度范围内都能发挥优良性能；
- 被粘表面无残留痕迹；
- 中性粘度,厚度0.048mm。


- It adopts PET as the base material and is made by coating acrylic adhesive on it. It can play excellent performance in a wide temperature range covering high and low temperature.
- No residual trace on the adhered surface.
- Medium viscosity,the thickness of tape is 0.048mm.

## MOPP胶带 MOPP NO Residual Tape

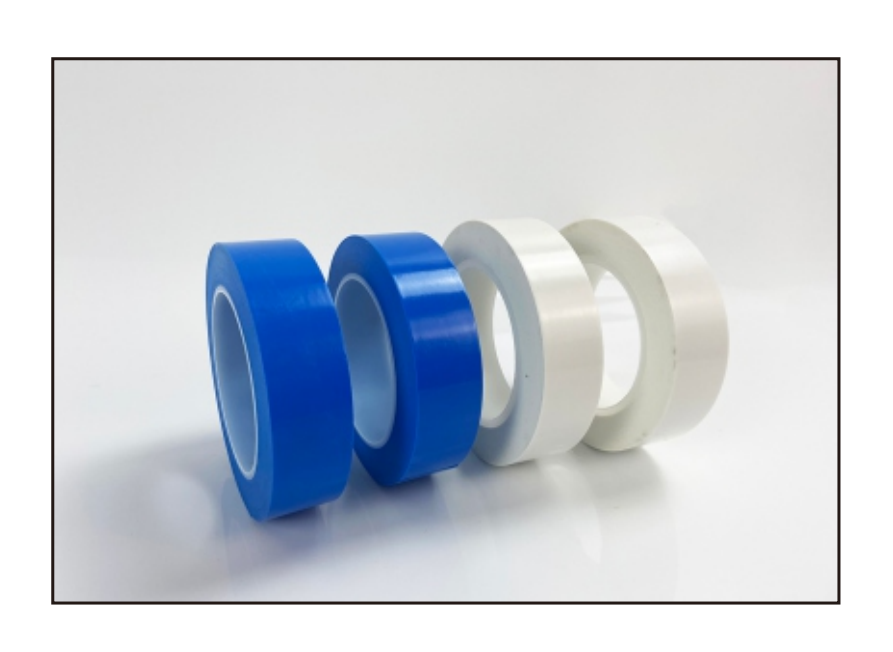

- 采用MOPP膜为基材，涂以橡胶胶黏剂制作而成，在高低温的广阔温度范围内都能发挥优良性能；
- 被粘表面无残留痕迹；
- 粘性高，厚度0.11mm。

- It adopts MOPP as the base material and is made by coating rubber on it. It can play excellent performance in a wide temperature range covering high and low temperature.
- No residual trace on the adhered surface.
- Good adhesive，the thickness of tape is 0.11mm.

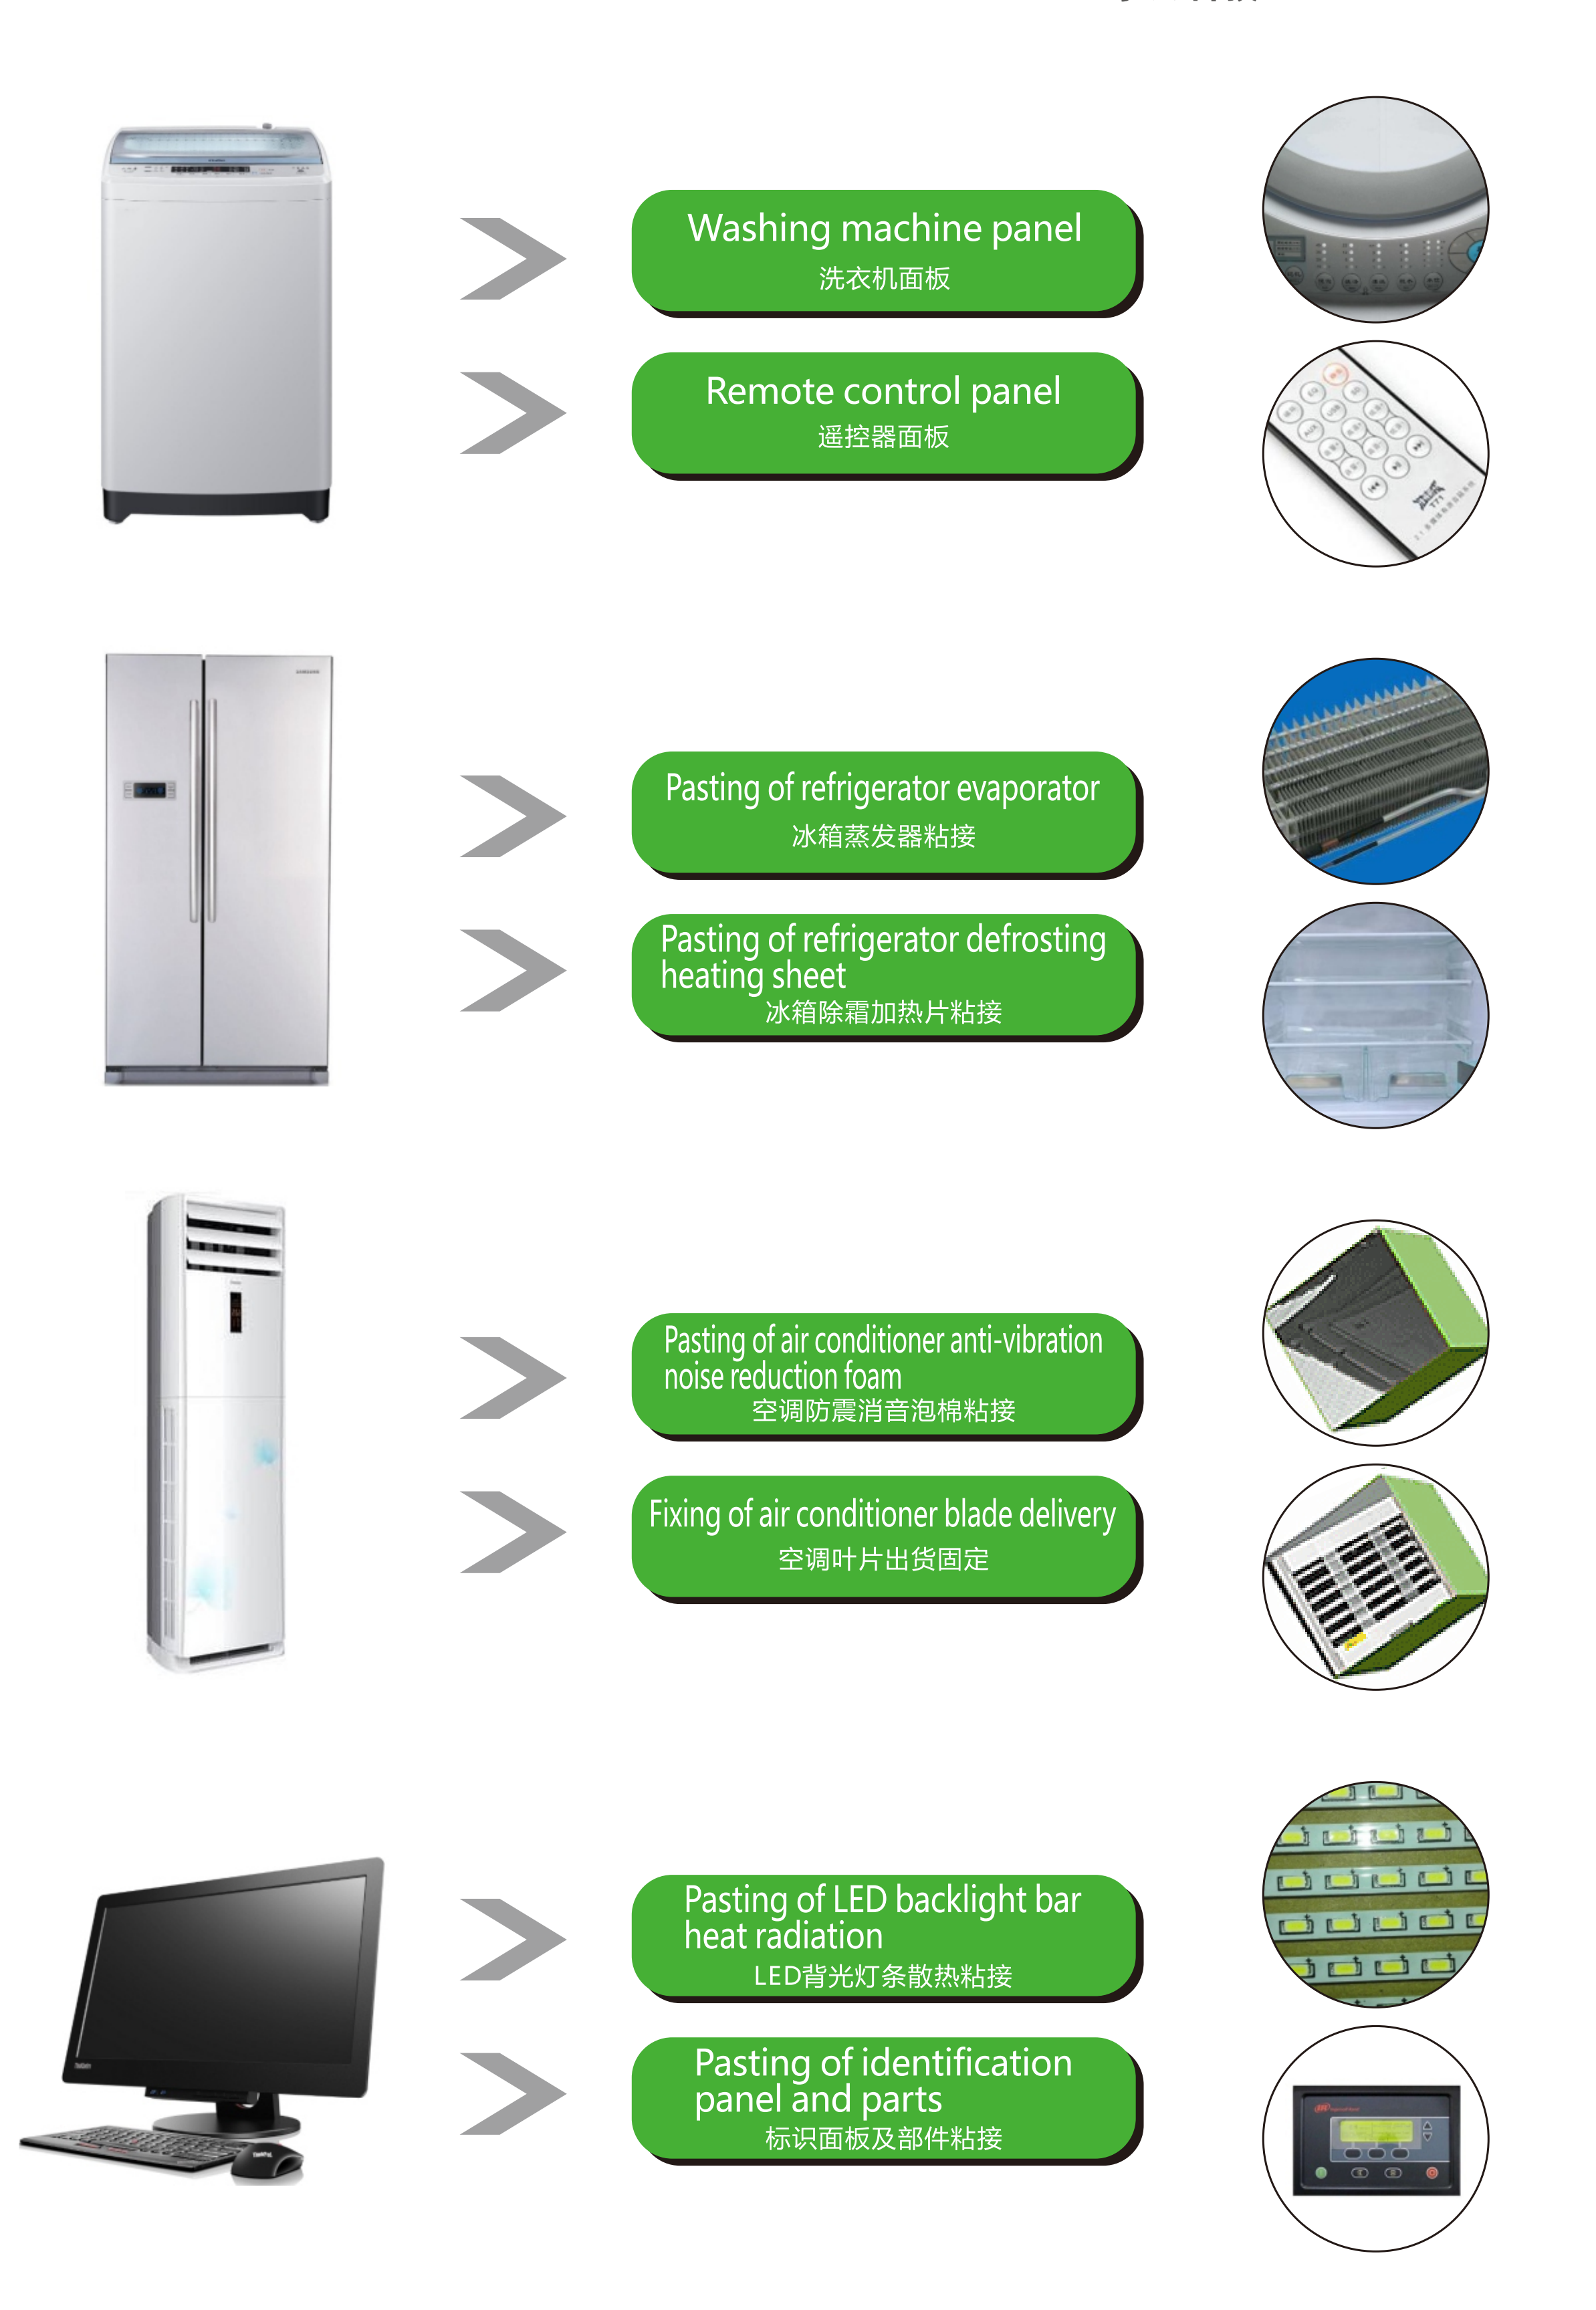


Washing machine panel
洗衣机面板
Remote control panel
遥控器面板
Pasting of refrigerator evaporator
冰箱蒸发器粘接
Pasting of refrigerator defrosting heating sheet
冰箱除霜加热片粘接
Pasting of air conditioner anti-vibration noise reduction foam
空调防震消音泡棉粘接
Fixing of air conditioner blade delivery
空调叶片出货固定
Pasting of LED backlight bar heat radiation
LED背光灯条散热粘接
Pasting of identification panel and parts
标识面板及部件粘接

# 单面胶带 | Single side Tape





## 滤芯胶带 Filtration Tape

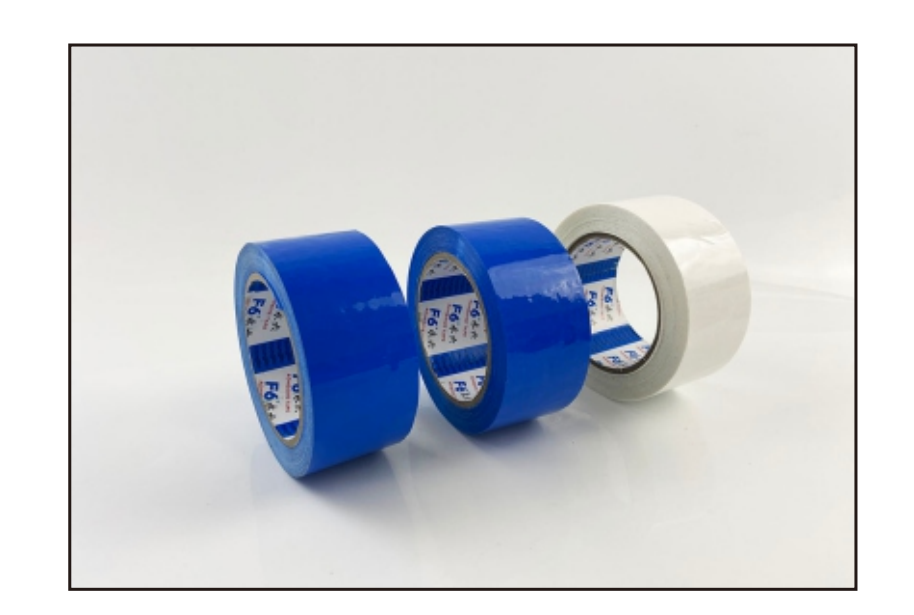


- 新型水过滤RO膜胶带蓝白胶带；
- 过滤胶带是用特殊油墨和特殊印刷工艺印制的；
- 适用于各种水净化设备运芯密封工艺，地面标记和危险区域标记，办公、停车场、仓库标记。

- New Water Filtration Residential RO Membrane Adhesive Tape Blue and White Tape.
- Filtration tape is using special ink and printed on special printing process.
- It is suitable for all kinds of water purification equipment ferrying core sealing process, for ground marking and dangerous area marking, for office, parking space and warehouse marking.




## 布基胶带 Black Duct Tape

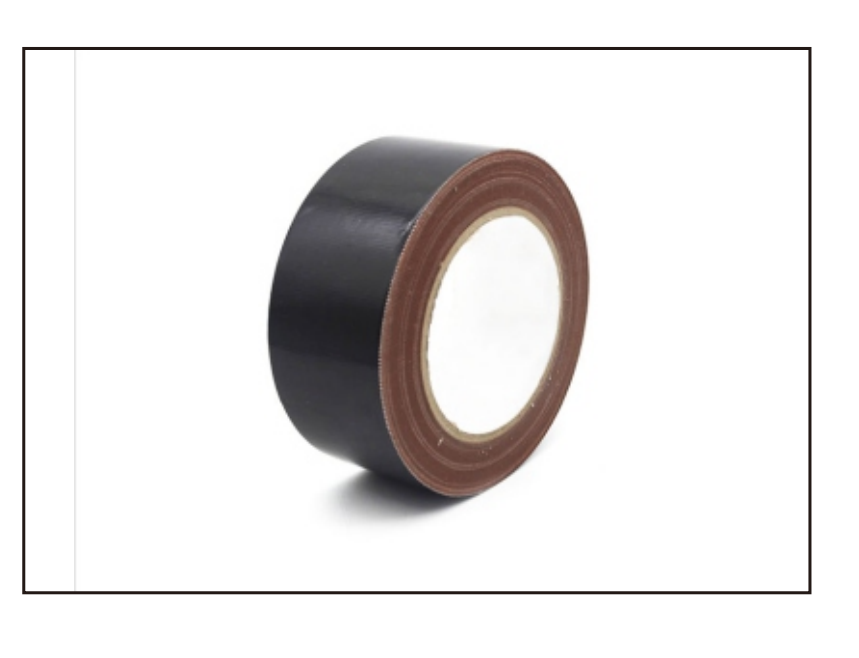

- 布基胶带具有抗拉能力强，不易拉断，粘性强，耐磨防水，牢固性好的特点。

- It adopts PE film laminated cloth as base material . It has strong tensile strength, not easy to break, strong viscosity, wear-resistant and waterproof, good fastness.

专业、专注、专心—— 您的满意，一直是我们不变的追求



0574–88913422

Make a call,get the top service.

一个电话 服务到家

## 研究开发 精益求精

高质量的产品和优秀的服务为社会服务

## 第三方SGS品质保证

## 定制专属您的产品

## 通过ISO9001体系

主营：低VOC低气味环保胶带、阻燃胶带、PE泡棉双面胶、PET胶带、丙烯酸压敏胶胶水





0574-88913422

Make a call,get the top service.

一个电话 服务到家




**宁波市永六包装材料科技有限公司**

Ningbo Yongliu Material Technology Co. Ltd.

地址：浙江省宁波市奉化区岳林街道龙潭村李子山

手机：18606581882　　电话：0574-88913422/88928985

传真：0574-88937228　Q Q：673994540

E-mail：yongliutape@163.com

http://www.yongliu-tape.com